

CARTS

UTILITY CARTS

AMCO by
SPG



ITEM# _____ MODEL# _____ QTY: _____
PROJECT: _____



Wire Utility Cart

Standard Features & Benefits

- ◆ Perfect for dozens of moving chores
- ◆ Choose from wire, heavy-duty tubular or Plasteel® construction
- ◆ Two or three shelf units with rubber casters are standard
- ◆ No tools required for assembly
- ◆ 41" overall height when using 5" casters
- ◆ Available in 18", 21" and 24" widths and many shelf lengths



Heavy Duty Utility Cart




Plasteel® Utility Cart

For SPG's complete product menu,
visit www.spgusa.com or call 877.503.4SPG (4774)

EXPECT MORE
SPG
STORAGE PRODUCTS GROUP

CARTS

SPECIFICATIONS

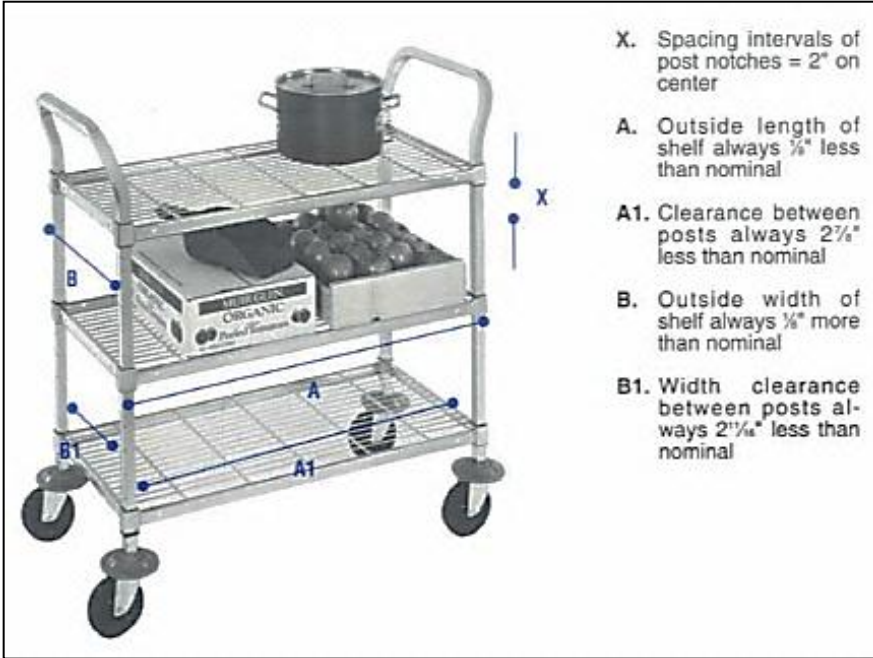

- X. Spacing intervals of post notches = 2" on center
- A. Outside length of shelf always 1/8" less than nominal
- A1. Clearance between posts always 2 1/4" less than nominal
- B. Outside width of shelf always 1/8" more than nominal
- B1. Width clearance between posts always 2 1/4" less than nominal

WIRE UTILITY CARTS (2 & 3-Shelf)

| Model No. | W x L x H | | Weight | |
|-----------------|----------------------|-------------------|--------|-------|
| | (In.) | (mm.) | (lbs.) | (Kg.) |
| AUC21836CP-CM5M | 21 1/8 x 38 7/8 x 41 | 537 x 987 x 1041 | 48 | 21.8 |
| AUC21848CP-CM5M | 21 1/8 x 50 7/8 x 41 | 537 x 1292 x 1041 | 56 | 25.4 |
| AUC22436CP-CM5M | 27 1/8 x 38 7/8 x 41 | 689 x 987 x 1041 | 53 | 24 |
| AUC22448CP-CM5M | 27 1/8 x 50 7/8 x 41 | 689 x 1292 x 1041 | 62 | 28.2 |
| AUC31836CP-CM5M | 21 1/8 x 38 7/8 x 41 | 537 x 987 x 1041 | 59 | 26.7 |
| AUC31848CP-CM5M | 21 1/8 x 50 7/8 x 41 | 537 x 1292 x 1041 | 71 | 32.2 |
| AUC32436CP-CM5M | 27 1/8 x 38 7/8 x 41 | 689 x 987 x 1041 | 67 | 30.4 |
| AUC32448CP-CM5M | 27 1/8 x 50 7/8 x 41 | 689 x 1292 x 1041 | 82 | 37.2 |

HEAVY DUTY UTILITY CARTS (2-Shelf)

| Model No. | W x L x H | | Weight | |
|-----------------|----------------------|-------------------|--------|-------|
| | (In.) | (mm.) | (lbs.) | (Kg.) |
| HDC21836CP-CM5M | 21 1/8 x 38 7/8 x 41 | 537 x 987 x 1041 | 53 | 24 |
| HDC21848CP-CM5M | 21 1/8 x 50 7/8 x 41 | 537 x 1292 x 1041 | 59 | 26.7 |
| HDC22436CP-CM5M | 27 1/8 x 38 7/8 x 41 | 689 x 987 x 1041 | 60 | 27.2 |
| HDC22448CP-CM5M | 27 1/8 x 50 7/8 x 41 | 689 x 1292 x 1041 | 68 | 30.8 |

PLASTEEL® UTILITY CARTS (2-Shelf)

| Model No. | W x L x H | | Weight | |
|-----------------|----------------------|-------------------|--------|-------|
| | (In.) | (mm.) | (lbs.) | (Kg.) |
| PSUC1836CP-CM5M | 21 1/8 x 38 7/8 x 41 | 537 x 987 x 1041 | 58 | 26.3 |
| PSUC1848CP-CM5M | 21 1/8 x 50 7/8 x 41 | 537 x 1292 x 1041 | 68 | 30.8 |
| PSUC2436CP-CM5M | 27 1/8 x 38 7/8 x 41 | 689 x 987 x 1041 | 65 | 29.5 |
| PSUC2448CP-CM5M | 27 1/8 x 50 7/8 x 41 | 689 x 1292 x 1041 | 77 | 35 |

Shelves available in these finishes:

| Finish | Suffix |
|--------------|--------|
| Plating Plus | CP |
| Polygard® | PG |
| Grey Bond® | GR |

AMCO II WIRE CARTS

Carts consist of two or three shelves (available in several finishes) and a pair of Plating Plus™ handles. Shelves have #8 (.162") gauge crosswires spaced on 1-1/16" centers with cross-braces 5/16" (.3125") minimum of 6" on center and running perpendicular to crosswires. Cross-braces welded at each end inside 5/8" leg of channel 9/16" x 1-1/4" x .090" thick with legs of channel pointed to center of shelf. A square tapered 1-3/4" high steel collar is welded at each corner. Additionally a suitable number of 5/16" (.3125") rebrace wires are welded to the underside of 18", 21" and 24" wide shelves in lengths of 54" and longer. All contact points are welded.

AMCO II HEAVY DUTY CARTS

Carts consist of two or three shelves (available in several finishes) and a pair of Plating Plus™ handles. Shelves to be constructed of .0475" thick 1" O.D. steel square tubing. A square tapered 1-3/4" high steel collar welded at each corner. Typical spacing between support tubes is 4-3/4" (120mm). Optional steel wire mat available with wire spacing approximately 5-1/4" x 3-1/4" (133mm x 83mm). All contact points of shelves and mats are welded.

AMCO PLASTEEL® CARTS


Cart consists of two or three shelves and a pair of Plating Plus™ handles. Shelves have a frame constructed of .0475 thick 1" O.D. steel square tubing. A square tapered 1-3/4" high steel collar is welded at each corner. Frames of 60" long shelves have an additional tube welded longitudinally onto the center of frame. Steel parts covered with hard baked gray plastic resin coating. Shelves constructed of structural foam molded high density polyethylene with the perimeter of the top surface to include a beveled marine edge. Top of the shelf is solid. Shelves securely fastened to the frame.

HANDLES

Handles are .065" thick, 1" O.D. square tubing notched on each corner every 2". Available only in Plating Plus™ finish.

METHOD OF ASSEMBLY

Four nylon tapered collets are packed with each shelf. The collet may be installed onto any notched position on the handles. Handles are installed into the tapered shelf collars which mate with the tapered nylon collet to securely seat the shelf onto the handles without special tools.

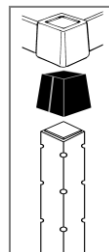

AMCO • Freestyle • ISS • Kelmax • LPI • Universal Stainless • Gillis-Jarke