

# CAN STORAGE RACKS

## FULL AND HALF SIZE UNITS

**KELMAX** by  
**SPG**



ITEM # \_\_\_\_\_ MODEL # \_\_\_\_\_ QTY: \_\_\_\_  
 PROJECT: \_\_\_\_\_  
 OPTIONS:  YES \_\_\_\_\_  NO \_\_\_\_\_



### Standard Features & Benefits

- ◆ Constructed of heavy duty extruded type 6063 aluminum alloy
- ◆ Unit is fully welded for greater strength
- ◆ Ships set up and ready to use
- ◆ FIFO — First In, First Out — Load and empty from front
- ◆ Half size unit doubles as work table to maximize your space
- ◆ Available with aluminum top, 304 Series stainless steel top or 5/8" poly top
- ◆ 5" Poly U expandable stem casters, 2 swivel with brakes and 2 rigid
- ◆ Mobile units (M): 5" polyurethane plate casters, 2 swivel with brakes and 2 rigid
- ◆ Lifetime guarantee against rust

#### Half Size Units

Model No.	Capacity of		D x L x H		Weight	
	No. 10 Cans	Type of Top	(in.)	(mm.)	(lbs.)	(kg.)
35" Height						
4H1602	54	None	35 x 28 x 35	889 x 711 x 889	47	21
4H1603	54	Aluminum	35 x 28 x 35	889 x 711 x 889	54	24
4H1604	54	Poly Top	35 x 28 x 35	889 x 711 x 889	65	29
4H1606	54	Stainless Steel	35 x 28 x 35	889 x 711 x 889	61	27
42" Height						
4H1608	72	None	35 x 28 x 42	889 x 711 x 1067	58	26
4H1609	72	Aluminum	35 x 28 x 42	889 x 711 x 1067	60	27
4H1610	72	Poly Top	35 x 28 x 42	889 x 711 x 1067	72	32
4H1613	72	Stainless Steel	35 x 28 x 42	889 x 711 x 1067	67	30

For SPG's complete product menu,  
 visit [www.spgusa.com](http://www.spgusa.com) or call 877.503.4SPG (4774)

EXPECT MORE  
**SPG**  
 STORAGE PRODUCTS GROUP

# CAN STORAGE RACKS

## SPECIFICATIONS

### CONSTRUCTION:

Constructed of Heavy-Duty extruded Type 6063 aluminum alloy. Unit is fully welded.

### UPRIGHTS & CROSS BRACES:

Uprights consist of 1 1/2" square aluminum tubing (.063" thick) and are fully welded to horizontal 1" square tubing (.063" thick) to support the can slides.

### CAN SLIDES:

Consist of extruded angles 1" X 1 1/2" X .078" thick and extruded T-Bar 3" x .078" thick. Can slides and T-Bar are welded to the frame. Spacing for slides is 7 3/8" on center. The back of each slide is set 1" higher to allow the cans to roll forward.

### CASTERS:


5" polyurethane plate casters, two rigid and two swivel with brakes.

### TOPS:

Poly tops are equipped with 5/8" polyethylene material held in place by eight (8) tabs welded to the unit (CSR-54, CSR-72 Series). Aluminum tops are fitted with a .090" thick aluminum sheet with lips turned down. Stainless Steel tops are fitted with 16-gauge Stainless Steel sheet with 1" lips turned down, all corners welded and polished.

### Full Size Units

Model No.	Capacity of No. 10 Cans	D x L x H (in.)	D x L x H (mm.)	Weight (lbs.)	Weight (kg.)
Full Size Unit- Holds 6 Cans Per Opening					
4H1580	162	35 x 25 x 71	889 x 635 x 1803	60	27
4H1593	216	35 x 37 x 71	889 x 940 x 1803	88	40
Full Size - Mobile					
4H1582	162	35 x 25 x 71	889 x 635 x 1803	60	27
4H1596	216	35 x 37 x 71	889 x 940 x 1803	88	40
Full Size Unit with Adjustable Feet					
4H1581	162	35 x 25 x 71	889 x 635 x 1803	60	27
4H1595	216	35 x 37 x 71	889 x 940 x 1803	88	40
FIFO Can Rack					
4H1579	156	42 x 28 x 80	1067 x 1067 x 2083	200	91
Economy Can Rack					
4H1616	162	35 x 25 x 71	889 x 635 x 1803	51	23

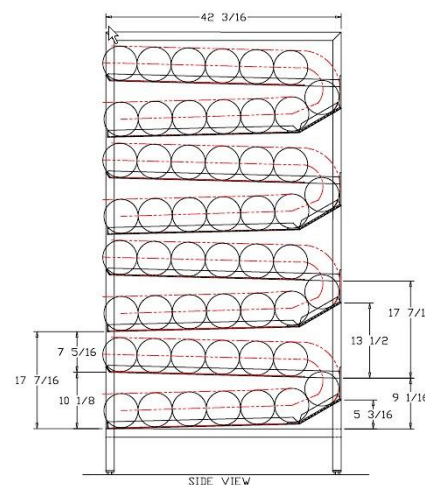

AMCO • Freestyle • ISS • Kelmax • LPI • Universal Stainless • Gillis-Jarke

SPG International, LLC  
11230 Harland Drive NE  
Covington, GA 30014  
877-503-4SPG (4774)

www.spgusa.com

The best names in the business  
all have one thing in common.

EXPECT MORE  
**SPG**  
STORAGE PRODUCTS GROUP